


lifepoint™

Rated, Tested and Self-Testing Height
Safety Fall Protection Systems

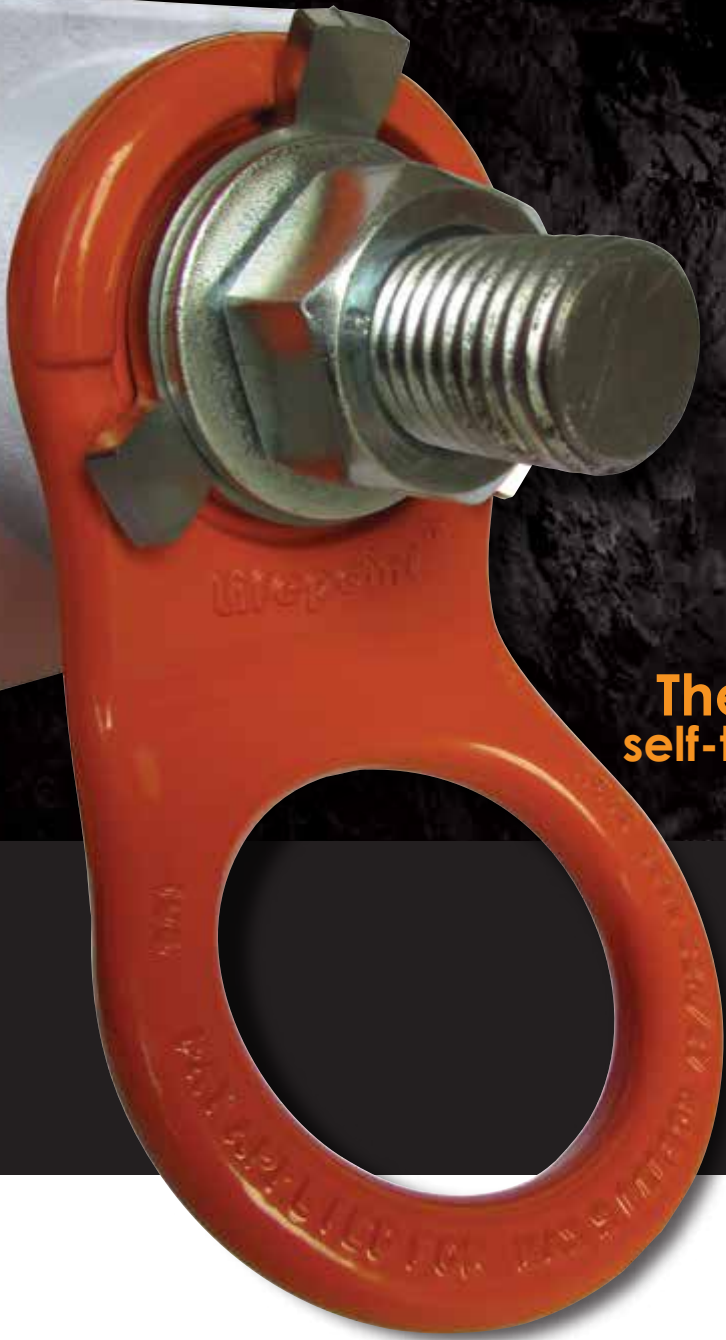

The lifepoint™ Rock Bolt Anchor
self-testing two person fall arrest anchor

The most innovative, advanced
and state-of-the-art fall arrest
anchor for use in today's
demanding high-risk work
environments.

Ph: 1300 193 277
www.lifepoint.com.au

lifepoint™

Rock Bolt Anchor

Two person fall arrest anchor

lifepoint™ Rock Bolt Anchor is a two person fall arrest anchor that is designed specifically for the mining and construction industry for fall arrest, fall restraint, work positioning, personnel riding and rescue systems.

When you install it you also test it

- 🔧 The unique, patented Load Sensing Washer tests the integrity of both the anchor substrate and the rock bolt when the anchor is installed.
- 🔧 This test load exceeds the 21kN requirement for a two person fall arrest anchor as per AS/NZS 1891.4:2009 and AS/NZS 5532:2013, ensuring the substrate and rock bolt also has the capacity for a two person fall arrest.

The mandatory 12 monthly inspections and testing are simplified

- 🔧 The ongoing mandatory 12 monthly test requirements are now as simple as replacing the patented Load Sensing Washer – saving valuable money and time.

Specifications

Designed to the highest standards:

Meets the requirements of AS/NZS 1891.4:2009 Industrial Fall-Arrest Systems and Devices.


Meets the requirements of AS/NZS 5532:2013 Manufacturing Requirements for Single point anchor device for harness-based work at height.

Statically and dynamically tested and certified to requirements for a two person free fall arrest anchor

Manufactured in Australia under strict Quality accreditation to ISO9001 and tested in a NATA accredited laboratory



Patent Applied For.

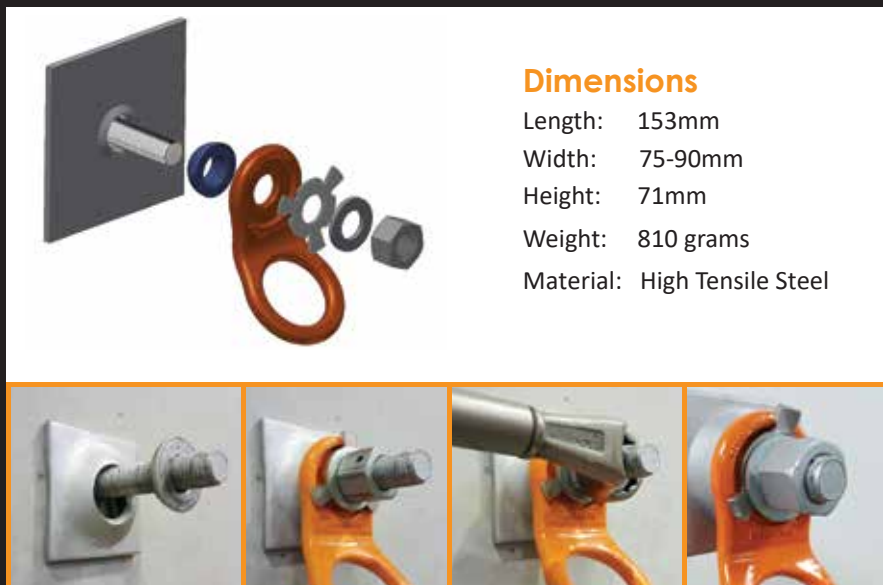

Dimensions

Length: 153mm
Width: 75-90mm
Height: 71mm
Weight: 810 grams
Material: High Tensile Steel

For more information on **lifepoint** range or to place an order, please contact our sales representative on:

P: 1300 193 277

E: sales@lifepoint.com.au